

# CONTACT

[www.bradleycollection.com](http://www.bradleycollection.com)



## UK & REST OF THE WORLD

+44 (0)1449 722 724

[info@bradleycollection.com](mailto:info@bradleycollection.com)

 **The Bradley Collection Ltd**  
Lion Barn • Maitland Road  
Needham Market • Suffolk  
IP6 8NS • UK

## USA & CANADA

+1 (310) 815 8255

[info.us@bradleycollection.com](mailto:info.us@bradleycollection.com)

 **The Bradley Collection Inc.**  
3625 Hayden Avenue, Suite E  
Culver City • CA  
90232 • USA



⚡ ECLIPSE

CEDIA  
MEMBER

the**bradley**collection

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard. Steel items are not recommended for damp conditions such as shower rooms. Crystal finials and acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories. Fluid Metal items are supplied unacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988. Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

**The Bradley Collection Ltd** Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Printed: 1122 • Copyright © The Bradley Collection Ltd. 2022



# ⚡ | ECLIPSE

Peerless and opulent, this collection truly has no rival.

A rare, luxurious aesthetic and freedom of expression in design are balanced with the final word in functionality and control.

The world's finest.

**Pictured:** ø38mm (1 1/2") Coverpole • Standard Stud • Brass Toned  
**Project by:** Gallagher London - London SW7 - UK

## LEADING MOTOR OPTIONS

Eclipse may be specified with your choice from the leading motorised systems. This provides power and control options ranging from standalone battery powered systems to fully integrated home automation solutions.



For Double pole systems, a hand drawn rear pole may be specified if preferred.



## LENGTH

Poles can be supplied to any length<sup>Ⓞ</sup>, subject to maximum weight loadings of the selected motorised system.



## BENT TO SHAPE

A bespoke bay bending service is available on all diameters to allow the perfect shaped pole to fit any bay window.



## SCALE

Eclipse poles are available in two pole diameters, Ø38mm (1½") • 50mm (2"). Finial designs are carefully scaled to maintain the system aesthetic.



## DETAILING

The secret of any design is in the detail. Eclipse now includes a complementary finish to nylon end housings, for a harmonious tonal effect.



## FUNCTION

A range of bracket options have been designed to ensure simple installation, including flush fit ceiling brackets.




## MODERN HEADINGS

The choice of motor systems means that modern headings can be accommodated, with both Wave<sup>®</sup> and Ripplefold<sup>®</sup> styles available.



# FINISHES

A brushed stainless steel base gives an edgy feel, with specially developed tints providing a change of mood to suit the needs of the project.




Brushed Stainless    Brass Tint ⊕⊖    Bronze Tint ⊕⊖    Carbon Tint ⊕⊖

The beauty of the mild steel base shines through with these special translucent finishes.



Polished    Natural Steel    Brass Toned    Matte Brass Toned    Oil Rubbed



Waxed

## ARCHITECTURAL METALLICS



Dawn    Mist    Sunset    Night Sky    Midnight

Due to printing limitations colours in this brochure may not be accurate  
Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

## Coat Options



Matte ⊕

Satin ⊕

Gloss ⊕

All poles and components may be specified in this stunning palette of colours and finishes, with a choice of coat options throughout.



Cloud ⊕⊕⊕    Barley ⊕⊕⊕    Bone ⊕⊕⊕    Cream ⊕⊕⊕    Parchment ⊕⊕⊕



Mineral ⊕⊕⊕    Dove ⊕⊕⊕    Millstone ⊕⊕⊕    Clay ⊕⊕⊕    Cocoa ⊕⊕⊕



Alabaster ⊕⊕⊕    Dusk ⊕⊕⊕    Ceramic ⊕⊕⊕    Slate ⊕⊕⊕    Flint ⊕⊕⊕



Damson ⊕⊕⊕    Moss ⊕⊕⊕    Smoke ⊕⊕⊕    Frame Grey ⊕⊕⊕    Raven ⊕⊕⊕



Platinum ⊕⊕    Champagne ⊕⊕    Gold ⊕⊕    Cognac ⊕⊕    Gunmetal ⊕⊕



Pewter ⊕⊕    Antique Brass ⊕⊕    Bronzed ⊕⊕

⊕ A finishing charge will apply    ⊕ Longer lead-times will apply



Pictured: ø38mm (1 1/2") Coverpole - Somfy • Contrast Stud • Light Bronze

Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

## FINISHES

### FLUID METAL™


Leading edge technology allows authentic metal coats to be applied to any substrate, which can then be worked and aged for a truly luxurious result.



Old Silver ⊕⊕⊕👉

Old Pewter ⊕⊕⊕👉

Old Brass ⊕⊕⊕👉

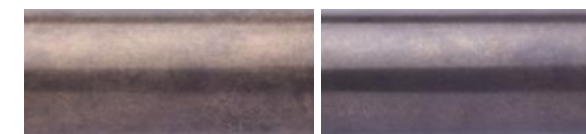

Light Bronze ⊕⊕⊕👉

Bronze Art ⊕⊕⊕👉

⊕ A finishing charge will apply   ⊕ Longer lead-times will apply   ⊕ Fluid Metal finishes are supplied unlacquered and will tarnish over time, a clear lacquer may be applied on request as a custom finish  
 👉 Fluid Metal finishes are hand produced, finish may vary.

# FINIALS

This design edit provides a solution for any project. Sharp, geometric designs give Eclipse a thoroughly modern persona, while rounded design cues offer a more classic feel, albeit still expressed with a more contemporary hand.



**Pictured:** ø38mm (1½") Coverpole - Silent Gliss • Faceted Disc • Brushed Stainless



**Flush End Cap®** - Supplied as standard

ø38mm (1½") Inclusive Length 6mm (¼")  
ø50mm (2") Inclusive Length 6mm (¼")



**Contrast Stud**

ø38mm (1½") Inclusive Length 20mm (¾")  
ø50mm (2") Inclusive Length 23mm (7⁄8")



**Standard Stud**

ø38mm (1½") Inclusive Length 9mm (³⁄₈")  
ø50mm (2") Inclusive Length 10mm (³⁄₈")



**Large Disc**

ø38mm (1½") Inclusive Length 7mm (¼")  
ø50mm (2") Inclusive Length 8mm (⁵⁄₁₆")



**Button Stud**

ø38mm (1½") Inclusive Length 58mm (2³⁄₁₆")  
ø50mm (2") Inclusive Length 69mm (2¹¹⁄₁₆")



**Faceted Disc**

ø38mm (1½") Inclusive Length 45mm (1³⁄₄")  
ø50mm (2") Inclusive Length 59mm (2³⁄₁₆")



**Ball & Collar**






ø38mm (1½") Inclusive Length 86mm (3³⁄₈")  
ø50mm (2") Inclusive Length 106mm (4³⁄₁₆")



**Ball**

ø38mm (1½") Inclusive Length 86mm (3³⁄₈")  
ø50mm (2") Inclusive Length 106mm (4³⁄₁₆")




# SINGLE BRACKETS

Side		Diameter	Projection from wall to track centre	Fixing plate size
		∅38mm (1 1/2") ∅50mm (2")	100mm (4") 100mm (4")	w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")
Mid	Mid - Joining	Diameter	Projection from wall to track centre	Fixing plate size
		∅38mm (1 1/2") ∅50mm (2")	100mm (4") 100mm (4")	w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
Flush	Flush - Joining	Diameter	Drop from ceiling to top of pole	Fixing plate size
		∅38mm (1 1/2") ∅50mm (2")	3mm (1/8") 3mm (1/8")	w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16")



**Pictured:** ∅38mm (1 1/2") Coverpole - Lutron • Contrast Stud ∅38mm (1 1/2") Coverpole - Lutron • Endcap • Flint

# DOUBLE BRACKETS

Side		Diameter	Projection from wall to track centre	Fixing plate size
		F∅38mm (1 1/2") B∅38mm (1 1/2") F∅38mm (1 1/2") B Uncovered track F∅50mm (2") B∅50mm (2") F∅50mm (2") B∅38mm (1 1/2") F∅50mm (2") B Uncovered track	F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8")	w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")
Mid	Mid - Joining	Diameter	Projection from wall to track centre	Fixing plate size
		F∅38mm (1 1/2") B∅38mm (1 1/2") F∅38mm (1 1/2") B Uncovered track F∅50mm (2") B∅50mm (2") F∅50mm (2") B∅38mm (1 1/2") F∅50mm (2") B Uncovered track	F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8")	w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")

# CUSTOM BRACKETS

Eclipse can be customised to suit virtually any window.

				
<b>Custom Projection</b> Specify the exact projection needed.	<b>Custom Fixing Plate</b> Relevant where space is restricted or weight is a concern.	<b>Uplift</b> Helps negotiate cornice and similar architectural features.	<b>Dropdown Ceiling</b> Specify exact projection required from ceiling.	<b>Angled Brackets</b> The solution for tight and awkward locations.

# ⚡ | ELECTRIC DRAPERY HARDWARE

For the full range of Electric poles and tracks visit [www.bradleycollection.com/electric](http://www.bradleycollection.com/electric)

For full technical information, sizes and weights please download the specification guide - [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

# SILENT GLISS® 5600



Straight poles maximum length 15 Metres (49ft)<sup>Ⓞ</sup>  
Bespoke bay service<sup>Ⓞ</sup>  
Standard gliders and rollers & Wave<sup>®</sup> gliders and rollers  
DC & AC hidden motor options

Touch and go manual operation  
System allows manual operation during power failure  
Quiet motors, noise level at 300mm (1') < 36dBA  
Wireless remote control, app control or home automation integration

## MOTOR OPTIONS

### 9060 Motor



Mains powered motor option.  
Requires professional installation.  
Suitable for systems up to 15M (49ft).

### 9060 Motor with radio module



Mains powered motor, with radio module for use with remote control options.  
Requires professional installation.  
Suitable for systems up to 15M (49ft).

Smart Expansion Module<sup>Ⓞ</sup> also available.


## CONTROL OPTIONS

### Remote Control



Single & Multi-channel hand held remote control options available.

### App Control Move & Smart



The system can be controlled with the Silent Gliss Move<sup>®</sup> app to allow control on smart devices. Or via the Smart<sup>®</sup> system allowing two way integration with all major home control systems

### Automation systems



The system can also be intergrated with all major home control systems.<sup>Ⓐ</sup>

<sup>Ⓞ</sup> Move server set 9960 is required for use with this app <sup>Ⓞ</sup> Smart only available in United Kingdom, requires Smart Expansion Module <sup>Ⓐ</sup> Specialist support & additional components required Weight restrictions apply. For full technical information please refer to the specification guide. [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

## GLIDING OPTIONS

Silent Gliss 5600 is available in 4 gliding options: Standard Gliders & Rollers, or Wave<sup>®</sup> Gliders & Rollers to be used with Wave<sup>®</sup> header tape.

### Gliders



**Drop from bottom of track:**  
20mm (13/16")

### Rollers<sup>Ⓞ</sup>



**Drop from bottom of track:**  
20mm (13/16")

### Wave<sup>®</sup> gliders



**Drop from bottom of track:**  
20mm (13/16")  
**Wave<sup>®</sup> Pitch:**  
80mm (3 1/8")

### Wave<sup>®</sup> rollers<sup>Ⓞ</sup>



**Drop from bottom of track:**  
20mm (13/16")  
**Wave<sup>®</sup> Pitch:**  
80mm (3 1/8")

## POLES

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")<sup>Ⓞ</sup>. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.



**Size**  
ø38mm (1 1/2")  
ø50mm

**Maximum distance between brackets**  
1500mm (60")  
1500mm (60")

**Minimum bend radius**  
R275mm (10 13/16")  
R275mm (10 13/16")

<sup>Ⓞ</sup> Supplied in sections - maximum section length 2.9m (9.5ft) <sup>Ⓞ</sup> Brushed finishes not available with bends <sup>Ⓞ</sup> Supplied as standard on systems over 2.9m (9.5ft) with single stack curtains



# SOMFY® GLYDEA, IRISMO & MOVELITE



Straight poles maximum length 12 Metres (39ft)Ⓞ  
Bespoke bay serviceⓄⓈ  
Standard roller, Ripple rollers and Ripplefold® rollers  
Mains & Battery powered motor options  
Touch and go manual operation

System allows manual operation during power failure  
Quiet motors, noise level at 1000mm (3') < 44dBA  
Fully compatible with Somfy RTS  
Wireless remote control, app control or home automation integration

## MOTOR OPTIONS

### Glydea Ultra 60e



**WT • DCT • RTS**  
Mains powered motor.  
RTS includes integrated radio receiver for use with remote control options.  
Requires professional installation.  
Suitable for systems up to 12M (39ft).

### Irismo 45 WF



**RTS**  
Battery powered motor, with integrated radio receiver for use with remote control options.  
Single charge lasts up to six months.  
Requires no pre-wiring.  
Suitable for systems up to 10M (33ft).

### Movelite 35



**WT • DCT • RTS**  
Mains powered motor.  
RTS includes integrated radio receiver for use with remote control options.  
Requires professional installation.  
Suitable for systems up to 10M (33ft).

### Movelite 35 WF



**RTS**  
Battery powered motor, with integrated radio receiver for use with remote control options.  
Single charge lasts up to four months.  
Requires no pre-wiring.  
Suitable for systems up to 6M (19ft)Ⓞ.

## CONTROL OPTIONS

### Remote Control



Single channel & Multi-channel hand held remote control options available.

### App Control



The system can be controlled with the Somfy Tahoma app or through smart devices & Amazon Alexa.

### Automation systems




The system can also be intergrated with all major home control systems.Ⓞ

Ⓞ Movelite35 WF is not suitable for bay bends Ⓢ Specialist support & additional components required  
Weight restrictions apply. For full technical information please refer to the specification guide. [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

## GLIDING OPTIONS

Somfy is available in 3 gliding options: Standard Rollers, Ripple Rollers, to be used with wave-style header tape. Or Ripplefold® Rollers to be used with Graber or Kirsch snap header tape.

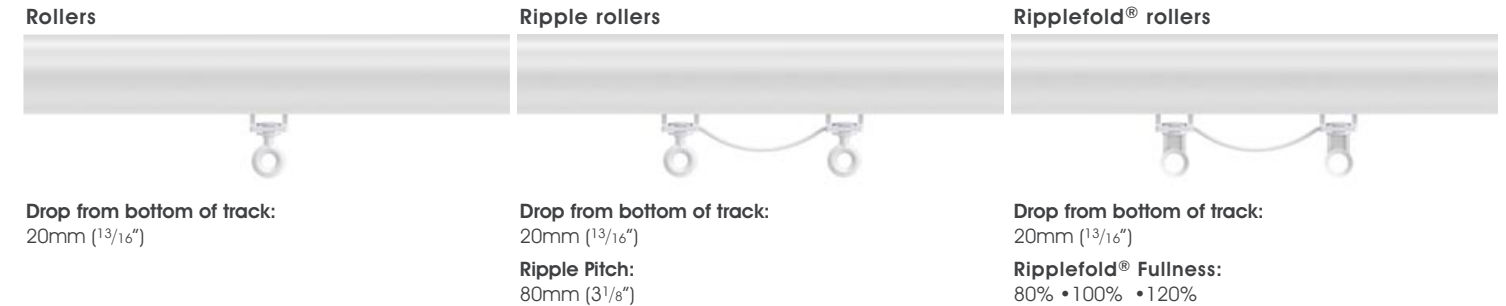

## POLES

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")Ⓞ. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.



Ⓞ Supplied in sections - maximum section length 2.9m (9.5ft) Ⓢ Brushed finishes not available with bends

Straight poles maximum length 9 Metres (29.5ft)<sup>Ⓞ</sup>  
 Bespoke bay service<sup>Ⓞ</sup>  
 Standard roller and Ripplefold<sup>®</sup> rollers  
 Low voltage concealed motors

Three motor ratings for differing curtain weights  
 Quiet motors, noise level at 1000mm (3') <44dBA  
 Fully compatible with Lutron<sup>®</sup> QS Home Automation systems  
 Wireless remote control, app control or home automation integration

## MOTOR OPTIONS

### Motor



**D105 • D145 • D175**  
 Mains powered motor options  
 .Requires professional installation.  
 Suitable for systems up to 15M (49ft).

### Motor with radio dongle



**D105 • D145 • D175**  
 Mains powered motor options , with radio  
 dongle for use with remote control options.  
 Requires professional installation.  
 Suitable for systems up to 15M (49ft).

## CONTROL OPTIONS

### Remote Control



Single hand held remote control  
 option available.

### App Control RA2 Select Hub



The system can be controlled with the Lutron app  
 or through smart devices & Amazon Alexa.

### Automation systems



The system can also be intergrated with all major  
 home control systems.<sup>Ⓞ</sup>

<sup>Ⓞ</sup> Specialist support & additional components required  
 Weight restrictions apply. For full technical information please refer to the specification guide. [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

## GLIDING OPTIONS

Lutron can be supplied with 2 gliding options: Standard Rollers, or Ripplefold<sup>®</sup> Rollers to be used with Graber or Kirsch snap header tape.

### Rollers



**Drop from bottom of track:**  
 12mm (7/16")

### Ripplefold<sup>®</sup> rollers



**Drop from bottom of track:**  
 20mm (13/16")  
**Ripplefold<sup>®</sup> Fullness:**  
 80% • 100% • 120%

## POLES

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")<sup>Ⓞ</sup>. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.



**Size**  
 ø38mm (1 1/2")  
 ø50mm

**Maximum distance between brackets**  
 1500mm (60")  
 1500mm (60")

**Minimum bend radius**  
 R275mm (10<sup>13/16</sup>")  
 R275mm (10<sup>13/16</sup>")

<sup>Ⓞ</sup> Supplied in sections - maximum section length 2.9m (9.5ft) <sup>Ⓞ</sup> Brushed finishes not available with bends